

Current and time based switch

Temperature limiter

Thermostat




D

10

20

30

40

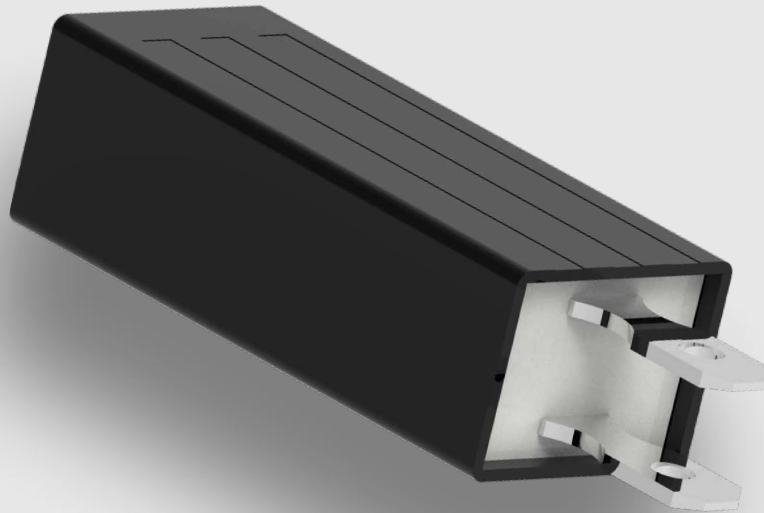

#### Applications

- Household appliances
- Electronics
- Fan heaters
- Automotive industry

#### Benefits

- More safety by self hold types
- Various housings
- Manual reset
- Customized ratings

## Description

Series D switches are based on a **complex system consisting of a contact spring unit and a thermo-bimetal snap-disc**. When heating up to the fixed switching point, the contact opens and thus interrupts the power circuit.

They are very flexible to use: Due to the different types of reset and the adjustable current sensitivity for quick shutdowns, the D switches offer **high quality solutions**, especially in very specific safety concepts.

Temperature switch with an **automatic reset D10**: After a certain cooling phase (temp. hysteresis) the contact switches back automatically.

Temperature limiter with **manual reset D20**: After opening the contacts and the subsequent cooling the contacts remain open until a manual reset is performed on the reset pin.

Temperature switch with **electr. self-hold D30 (230V) / D40 (120V)**: After opening the contacts the switch is heated by a parallel connected resistor and thus kept open. The automatic reset is only performed through a mains disconnection, or off-switching of the device in which the temperature switch is installed.



## Technical data

type ratings		control			
		D10V	D20V	D30V	D40V
function		automatic	manual	self hold 230 V	self hold 120 V
version		normally closed			
VDE	rated current at 50 / 60 Hz ( power factor 0.95 / 0.6 )	16 A / 2.5 A (250 V)	16 A / 2.5 A (250 V)	16 A / 2.5 A (230 V)	19.2 A / 2.5 A (120 V)
	switching cycles	10,000	1,000	10,000	8,000
	temperature range T <sub>A</sub> ( steps in 5 °C )	70 °C ... 160 °C	70 °C ... 130°C / 140 °C	70 °C ... 160 °C	
UL	rated current at 50 / 60 Hz ( power factor 1,0 / 0,75 )	16 A / 6.3 A (250 V)			16 A / - (125 V)
	switching cycles	6,000			
	temperature range T <sub>A</sub> ( steps in 5 °C )	70 °C ... 160 °C			
max. current ( power factor 0.95 )		25 A			
switching cycles under max. current		200			
tolerance		Standard: ± 5 °C			
feature of automatic action		1.B, 2.B	2.B, 2.C	2.C.AK	
contact resistance		< 50 mΩ			
hysteresis / reset temperature <sup>1)</sup>		30 °C ± 15 °C / -	- / < -20 °C ; < -10 °C	- / < -20 °C <sup>2)</sup>	
degree of protection provided by enclosures (EN 60529)		IP00			
suitable for use in protection class		I, II			
approvals	VDE / ENEC		EN 60730-1 / -2-9		
	UL		UL 873		
	CSA		C22.2 No. 24 <sup>3)</sup>		
	CQC		GB14536.1-1998 / GB14536.10-1996 <sup>4)</sup>		









<sup>1)</sup> at the T<sub>A</sub> (upper and lower) limits the hysteresis could deviate <sup>2)</sup> without air flow <sup>3)</sup> different power rating <sup>4)</sup> details on request

For special applications version P is available with a very low self heating rate.

Manual reset: The maximum operating force must not exceed 6 N. The control should not be reset before the starting conditions are reached, meaning there should be a satisfactory cooling down time!





Technical data on request.

## Versions

TCO		illustration	drawing dimensions ( mm )	technical specification	approvals
standard	current - time based <sup>1)</sup>				
D10V	D12V			base of thermosetting plastic	VDE, UL, CSA
D10V D30V D40V with housing G115	D12V D32V D42V with housing G115			housing PPS base of thermosetting plastic UL: T <sub>A</sub> bis 130°C	VDE, UL, CSA
D20V with housing G776	D22V with housing G776			manual reset housing PA/PPS base of thermosetting plastic	VDE, UL, CSA
D10V with housing G774	D22V with housing G774			housing PA/PPS base of thermosetting plastic	VDE, UL, CSA


<sup>1)</sup> For current-time based types (execution D, J, K, L, M, P, R, V) the following information must be provided:

- DC or AC voltage  $U_N$  in Volts.
- Continuous operating current  $I_C$  in Amps at which the switch must not respond.
- Current level  $I_0$  in Amps at which the switch must respond and the response time  $t_0$  (in seconds  $\pm$  tolerance).
- Ambient temperatures which could be experienced both in normal operation and in switching conditions.
- Maximum current in Amps.


code	used in TCO	illustration	drawing dimensions ( mm )	technical specification	approvals
standard	D10, D12 D20, D22 D30, D32 D40, D42			terminals for soldering CuNi18Zn20 <sup>1)</sup>	VDE, UL, CSA
A308	D10, D12 D20, D22 D30, D32 D40, D42			terminals for soldering bent 90° CuNi18Zn20 <sup>1)</sup>	VDE, UL

<sup>1)</sup> P types have terminals of CuFe2P material

D series switches are also available with lead wires in combination with insulating shrink sleeves.  
Technical data on request.

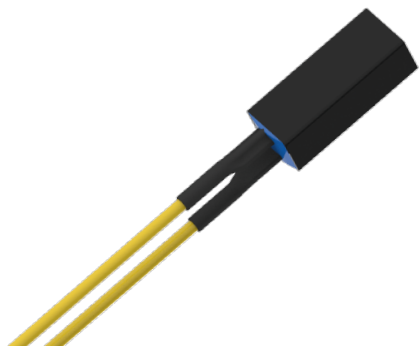


## Current vs. self heating

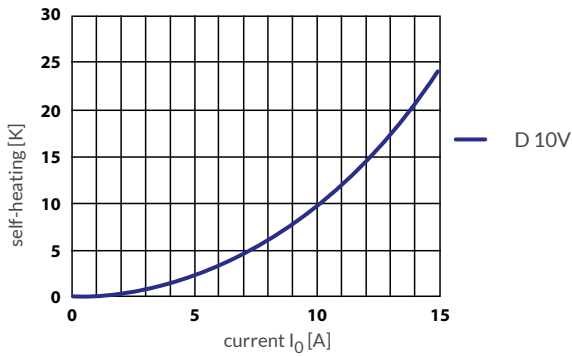


Test conditions:  
Measurement in air flow and lead wires of 1.5 mm<sup>2</sup>.

## Current vs. response time

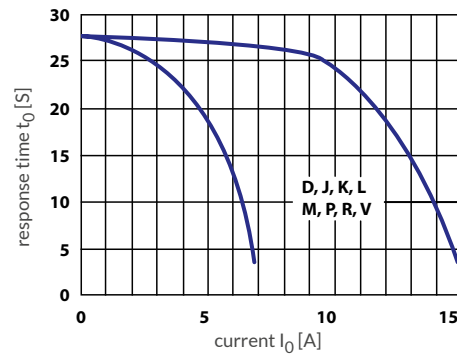

TCO variations for current-time based applications.

## Ordering example

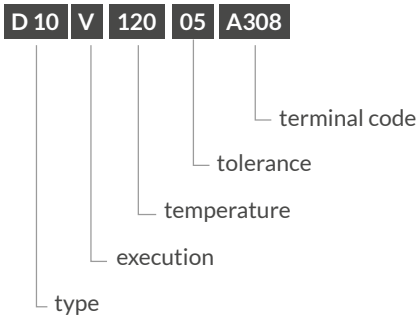

## Marking

<b>D10V</b>	type and execution
<b>E</b>	country (D=Germany)
<b>12005</b>	response temperature (120°C), tolerance ( $\pm 5^\circ\text{C}$ )
<b>047</b>	date of manufacture (May 2017)
<b>D12D</b>	type and execution
<b>H</b>	country (H=China)
<b>--123</b>	customized type with drawing number
<b>047</b>	customized type with drawing number

## Microtherm Sentronic GmbH

Taschenwaldstraße 3  
75181 Pforzheim  
Deutschland  
Tel.: +49 7231 787-0  
Fax: +49 7231 787-155  
info@microtherm.de  
www.microtherm.de



**MICROTHERM**  
sentronic